

M12 Series – With Plug Connection




Standard Technical Data

Voltage type	DC
Housing diameter D	12 mm

For detailed data and description, see the datasheet. Further products can be found online at www.pepperl-fuchs.com.

Model number	Type of installation	Detection range [mm]	Output type	Output type	Switching function	Switching frequency [Hz]	UB (min)	UB (max)	Connection type	Length L	CCC	CSA	EAC	UL
NBB2-12GM30-E2-V1	Flush	2	3-wire	PNP	Normally-open (NO)	800	10	30	M12 connector plug	45	■	■	■	■
NBB2-12GM40-E0-V1	Flush	2	3-wire	NPN	Normally-open (NO)	1000	10	30	M12 connector plug	50	■	■	■	■
NBB2-12GM40-E2-V1	Flush	2	3-wire	PNP	Normally-open (NO)	1000	10	30	M12 connector plug	50	■	■	■	■
NBB2-12GM40-Z0-V1	Flush	2	2-wire	2-wire	Normally-open (NO)	1000	5	60	M12 connector plug	40	■	■	■	■
NBB2-12GM40-Z3-V1	Flush	2	2-wire	2-wire	Normally-open (NO)	1000	5	60	M12 connector plug	40	■	■	■	■
NBB2-12GM50-A2-V1	Flush	2	4-wire	PNP	Complementary	1000	10	30	M12 connector plug	50	■	■	■	■
NBB2-12GM50-E0-V1	Flush	2	3-wire	NPN	Normally-open (NO)	1500	10	30	M12 connector plug	50	■	■	■	■
NBB2-12GM50-E1-V1	Flush	2	3-wire	NPN	Normally-closed (NC)	1500	10	30	M12 connector plug	50	■	■	■	■
NBB2-12GM50-E2-V1	Flush	2	3-wire	PNP	Normally-open (NO)	1500	10	30	M12 connector plug	50	■	■	■	■
NBB2-12GM50-E3-V1	Flush	2	3-wire	PNP	Normally-closed (NC)	1500	10	30	M12 connector plug	50	■	■	■	■
NBB2-12GM60-A0-V1	Flush	2	4-wire	NPN	Complementary	1000	10	30	M12 connector plug	70	■	■	■	■
NBB2-12GM60-A2-V1	Flush	2	4-wire	PNP	Complementary	1000	10	30	M12 connector plug	70	■	■	■	■
NBB2-12GM60-E2-V1	Flush	2	3-wire	PNP	Normally-open (NO)	1500	10	30	M12 connector plug	70	■	■	■	■
NBB2-12GS40-Z4L-V1	Flush	2	2-wire		Normally-open (NO)	700	3.7	30	M12 connector plug	55				
NCB2-12GM40-Z0-V1	Flush	2	2-wire	2-wire	Normally-open (NO)	800	5	60	M12 connector plug	40	■	■	■	■
NCB2-12GM40-Z1-V1	Flush	2	2-wire	2-wire	Normally-closed (NC)	800	5	60	M12 connector plug	40	■	■	■	■
NCB2-12GM60-B3-V1	Flush	2	2-wire	AS-Interface	Normally open/close selectable	500	26.5	31.9	M12 connector plug	60	■	■	■	■
NJ2-12GM40-E-V1	Flush	2	3-wire	NPN	Normally-open (NO)	3000	10	60	M12 connector plug	50	■	■	■	■
NJ2-12GM40-E2-V1	Flush	2	3-wire	PNP	Normally-open (NO)	3000	10	60	M12 connector plug	50	■	■	■	■
NJ2-12GM40-E3-V1	Flush	2	3-wire	PNP	Normally-closed (NC)	3000	10	60	M12 connector plug	50	■	■	■	■
NBB4-12GM30-E0-V1	Flush	4	3-wire	NPN	Normally-open (NO)	500	10	30	M12 connector plug	35	■	■	■	■
NBB4-12GM30-E2-V1	Flush	4	3-wire	PNP	Normally-open (NO)	500	10	30	M12 connector plug	30	■	■	■	■
NBB4-12GM30-E2-V3	Flush	4	3-wire	PNP	Normally-open (NO)	500	10	30	M8 connector plug	30	■	■	■	■
NBB4-12GM30-E3-V1	Flush	4	3-wire	PNP	Normally-closed (NC)	500	10	30	M12 connector plug	30	■	■	■	■
NBB4-12GM35-A0-V1	Flush	4	4-wire	NPN	Complementary	2500	10	30	M12 connector plug	51				■
NBB4-12GM35-A2-V1	Flush	4	4-wire	PNP	Complementary	2500	10	30	M12 connector plug	51				■
NBB4-12GM50-A0-V1	Flush	4	4-wire	NPN	Complementary	1500	10	30	M12 connector plug	65	■	■	■	■
NBB4-12GM50-A2-V1	Flush	4	4-wire	PNP	Complementary	1500	10	30	M12 connector plug	65	■	■	■	■
NBB4-12GM50-E0-V1	Flush	4	3-wire	NPN	Normally-open (NO)	800	10	30	M12 connector plug	65	■	■	■	■
NBB4-12GM50-E1-V1	Flush	4	3-wire	NPN	Normally-closed (NC)	800	10	30	M12 connector plug	65	■	■	■	■
NBB4-12GM50-E2-V1	Flush	4	3-wire	PNP	Normally-open (NO)	800	10	30	M12 connector plug	50	■	■	■	■
NBB4-12GM50-E3-V1	Flush	4	3-wire	PNP	Normally-closed (NC)	800	10	30	M12 connector plug	65	■	■	■	■
NCB4-12GM40-Z4-V1	Flush	4	2-wire	2-wire	Normally-open (NO)	1000	3.5	30	M12 connector plug	35	■	■	■	■
NCB4-12GM40-Z5-V1	Flush	4	2-wire	2-wire	Normally-closed (NC)	1000	3.5	30	M12 connector plug	35	■	■	■	■
NCB4-12GM40-Z7-V1	Flush	4	2-wire	2-wire	Normally-closed (NC)	1000	3.5	30	M12 connector plug	35	■	■	■	■
NCB4-12GM50-E2-V1	Flush	4	3-wire	PNP	Normally-open (NO)	800	10	30	M12 connector plug	50	■	■	■	■
NCB4-12GM60-B3-V1	Flush	4	2-wire	AS-Interface	Normally open/close selectable	500	26.5	31.9	M12 connector plug	60	■	■	■	■
NCB4-12GM60-B3B-V1	Flush	4	2-wire	AS-Interface	Normally open/close selectable	500	26.5	31.9	M12 connector plug	60	■	■	■	■


Model number	Type of installation	Detection range [mm]	Output type	Output type	Switching function	Switching frequency [Hz]	UB (min)	UB (max)	Connection type	Length L	CCC	CSA	EAC	UL
NEB6-12GM50-E0-V1	Semi-flush	6	3-wire	NPN	Normally-open (NO)	800	10	30	M12 connector plug	60				■ ■
NEB6-12GM50-E1-V1	Semi-flush	6	3-wire	NPN	Normally-closed (NC)	800	10	30	M12 connector plug	60				■ ■
NEB6-12GM50-E2-V1	Semi-flush	6	3-wire	PNP	Normally-open (NO)	800	10	30	M12 connector plug	60				■ ■
NEB6-12GM50-E3-V1	Semi-flush	6	3-wire	PNP	Normally-closed (NC)	800	10	30	M12 connector plug	60				■ ■
NEB8-12GM50-E2-V1	Semi-flush	8	3-wire	PNP	Normally-open (NO)	400	10	30	M12 connector plug	60				■ ■
NBN4-12GM35-A0-V1	Non-flush	4	4-wire	NPN	Complementary	800	10	30	M12 connector plug	35				■ ■
NBN4-12GM35-A2-V1	Non-flush	4	4-wire	PNP	Complementary	800	10	30	M12 connector plug	35				■ ■
NBN4-12GM40-E0-V1	Non-flush	4	3-wire	NPN	Normally-open (NO)	1200	10	30	M12 connector plug	50				■ ■
NBN4-12GM40-E2-V1	Non-flush	4	3-wire	PNP	Normally-open (NO)	1200	10	30	M12 connector plug	50				■ ■
NBN4-12GM40-Z0-V1	Non-flush	4	2-wire	2-wire	Normally-open (NO)	1000	5	60	M12 connector plug	40				■ ■
NBN4-12GM40-Z3-V1	Non-flush	4	2-wire	2-wire	Normally-open (NO)	1000	5	60	M12 connector plug	40				■ ■
NBN4-12GM50-E0-V1	Non-flush	4	3-wire	NPN	Normally-open (NO)	1200	10	30	M12 connector plug	50				■ ■
NBN4-12GM50-E1-V1	Non-flush	4	3-wire	NPN	Normally-closed (NC)	1200	10	30	M12 connector plug	50				■ ■
NBN4-12GM50-E2-V1	Non-flush	4	3-wire	PNP	Normally-open (NO)	1200	10	30	M12 connector plug	50				■ ■
NBN4-12GM50-E3-V1	Non-flush	4	3-wire	PNP	Normally-closed (NC)	1200	10	30	M12 connector plug	50				■ ■
NBN4-12GM60-A0-V1	Non-flush	4	4-wire	NPN	Complementary	1200	10	30	M12 connector plug	70				■ ■
NBN4-12GM60-A2-V1	Non-flush	4	4-wire	PNP	Complementary	1200	10	30	M12 connector plug	70				■ ■
NBN4-12GS40-Z4L-V1	Non-flush	4	2-wire	2-wire	Normally-open (NO)	700	3.7	30	M12 connector plug	55				
NCN4-12GM40-Z0-V1	Non-flush	4	2-wire	2-wire	Normally-open (NO)	800	5	60	M12 connector plug	40				■ ■
NCN4-12GM40-Z1-V1	Non-flush	4	2-wire	2-wire	Normally-closed (NC)	800	5	60	M12 connector plug	40				■ ■
NCN4-12GM60-B3-C2-V1	Non-flush	4	2-wire	AS-Interface	Normally open/close selectable	500	26.5	31.9	M12 connector plug	60				■ ■
NCN4-12GM60-B3B-C2-V1	Non-flush	4	2-wire	AS-Interface	Normally open/close selectable	500	26.5	31.9	M12 connector plug	60				■ ■
NJ4-12GM40-E-V1	Non-flush	4	3-wire	NPN	Normally-open (NO)	2000	10	60	M12 connector plug	50				■ ■
NJ4-12GM40-E2-V1	Non-flush	4	3-wire	PNP	Normally-open (NO)	2000	10	60	M12 connector plug	50				■ ■
NJ4-12GM40-E3-V1	Non-flush	4	3-wire	PNP	Normally-closed (NC)	2000	10	60	M12 connector plug	50				■ ■
NBN7-12GM35-E2-V1	Non-flush	7	3-wire	PNP	Normally-open (NO)	300	10	30	M12 connector plug	35				■ ■
NBN7-12GM35-E3-V1	Non-flush	7	3-wire	PNP	Normally-closed (NC)	300	10	30	M12 connector plug	35				■ ■
NBN8-12GM35-A0-V1	Non-flush	8	4-wire	NPN	Complementary	2000	10	30	M12 connector plug	51				■ ■
NBN8-12GM35-A2-V1	Non-flush	8	4-wire	PNP	Complementary	2000	10	30	M12 connector plug	51				■ ■
NBN8-12GM50-A0-V1	Non-flush	8	4-wire	NPN	Complementary	1500	10	30	M12 connector plug	65				■ ■
NBN8-12GM50-A2-V1	Non-flush	8	4-wire	PNP	Complementary	1500	10	30	M12 connector plug	65				■ ■
NBN8-12GM50-E0-V1	Non-flush	8	3-wire	NPN	Normally-open (NO)	1500	10	30	M12 connector plug	50				■ ■
NBN8-12GM50-E2-V1	Non-flush	8	3-wire	PNP	Normally-open (NO)	1500	10	30	M12 connector plug	50				■ ■
NCN8-12GM40-Z4-V1	Non-flush	8	2-wire	2-wire	Normally-open (NO)	750	3.5	30	M12 connector plug	35				■ ■
NCN8-12GM40-Z5-V1	Non-flush	8	2-wire	2-wire	Normally-closed (NC)	750	3.5	30	M12 connector plug	35				■ ■
NCN8-12GM40-Z7-V1	Non-flush	8	2-wire	2-wire	Normally-closed (NC)	750	3.5	30	M12 connector plug	35				■ ■
NEN10-12GM50-E0-V1	Non-flush	10	3-wire	NPN	Normally-open (NO)	600	10	30	M12 connector plug	60				■ ■
NEN10-12GM50-E1-V1	Non-flush	10	3-wire	NPN	Normally-closed (NC)	600	10	30	M12 connector plug	60				■ ■
NEN10-12GM50-E2-V1	Non-flush	10	3-wire	PNP	Normally-open (NO)	600	10	30	M12 connector plug	60				■ ■
NEN10-12GM50-E3-V1	Non-flush	10	3-wire	PNP	Normally-closed (NC)	600	10	30	M12 connector plug	60				■ ■

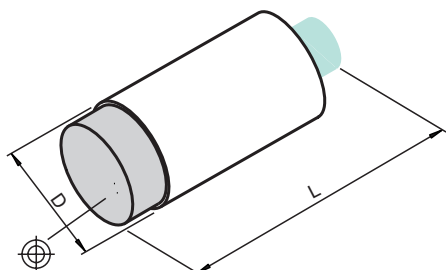

Accessories	
BF 12	Mounting adapter, 12 mm
EXG-12	Quick-mounting bracket with fixed stop
V1-G-2M-PUR	Single-ended female cordset, M12, 4-pin, PUR cable
V1-G-BK0,3M-PUR-U-V1-G	Cordset, M12 to M12, PUR cable, 4-pin
V1-G-BK1M-PUR-U-V1-G	Cordset, M12 to M12, PUR cable, 4-pin
V1-W-2M-PUR	Single-ended female cordset, M12, 4-pin, PUR cable
V3-WM-2M-PUR	Single-ended female cordset, M8, 3-pin, PUR cable



M12 Series – With Cable Connection

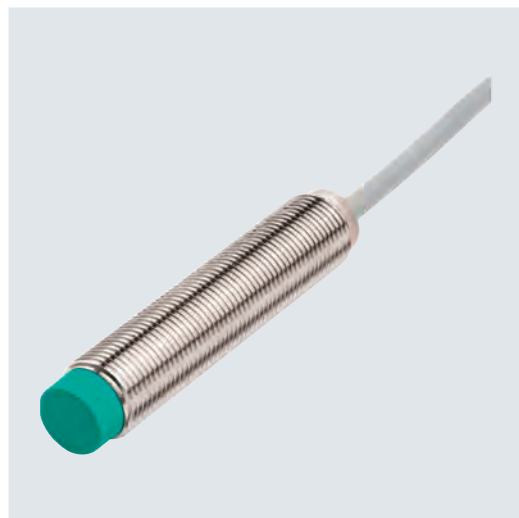

Standard Technical Data	
Voltage type	DC
Connection type	Fixed cable
Housing diameter D	12 mm

For detailed data and description, see the datasheet. Further products can be found online at www.pepperl-fuchs.com.

Model number	Type of installation	Detection range [mm]	Output type	Output type	Switching function	Switching frequency [Hz]	UB (min)	UB (max)	Cable length [mm]	Cable material	Length L	CCC	CSA	EAC	UL
NBB2-12GK50-E0	Flush	2	3-wire	NPN	Normally-open (NO)	1500	10	30	2000	PVC	50				
NBB2-12GK50-E2	Flush	2	3-wire	PNP	Normally-open (NO)	1500	10	30	2000	PVC	50				
NBB2-12GK50-E2-10M	Flush	2	3-wire	PNP	Normally-open (NO)	1500	10	30	10000	PVC	50				
NBB2-12GK60-E2-5M PUR	Flush	2	3-wire	PNP	Normally-open (NO)	1000	10	30	5000	PUR	60				
NBB2-12GM30-E2	Flush	2	3-wire	PNP	Normally-open (NO)	800	10	30	2000	PVC	30				
NBB2-12GM40-E0	Flush	2	3-wire	NPN	Normally-open (NO)	1000	10	30	2000	PVC	40				
NBB2-12GM40-E1	Flush	2	3-wire	NPN	Normally-closed (NC)	1000	10	30	2000	PVC	40				
NBB2-12GM40-E2	Flush	2	3-wire	PNP	Normally-open (NO)	1000	10	30	2000	PVC	40				
NBB2-12GM40-E3	Flush	2	3-wire	PNP	Normally-closed (NC)	1000	10	30	2000	PVC	40				
NBB2-12GM40-Z0	Flush	2	2-wire	2-wire	Normally-open (NO)	1000	5	60	2000	PVC	40				
NBB2-12GM50-E0	Flush	2	3-wire	NPN	Normally-open (NO)	1500	10	30	2000	PVC	50				
NBB2-12GM50-E0-5M	Flush	2	3-wire	NPN	Normally-open (NO)	1500	10	30	5000	PVC	50				
NBB2-12GM50-E1	Flush	2	3-wire	NPN	Normally-closed (NC)	1500	10	30	2000	PVC	50				
NBB2-12GM50-E2	Flush	2	3-wire	PNP	Normally-open (NO)	1500	10	30	2000	PVC	50				
NBB2-12GM50-E2-2M PUR	Flush	2	3-wire	PNP	Normally-open (NO)	1500	10	30	2000	PUR	50				
NBB2-12GM50-E2-5M	Flush	2	3-wire	PNP	Normally-open (NO)	1500	10	30	5000	PVC	50				
NBB2-12GM50-E3	Flush	2	3-wire	PNP	Normally-closed (NC)	1500	10	30	2000	PVC	50				
NBB2-12GM60-A0	Flush	2	4-wire	NPN	Complementary	1000	10	30	2000	PVC	60				
NBB2-12GM60-A2	Flush	2	4-wire	PNP	Complementary	1000	10	30	2000	PVC	60				
NBB2-12GS40-Z4L	Flush	2	2-wire	2-wire	Normally-open (NO)	700	3.7	30	2000	PVC	40				
NCB2-12GM40-Z0	Flush	2	2-wire	2-wire	Normally-open (NO)	800	5	60	2000	PUR	40				
NCB2-12GM40-Z1	Flush	2	2-wire	2-wire	Normally-closed (NC)	800	5	60	2000	PUR	40				
NJ2-12GM40-E	Flush	2	3-wire	NPN	Normally-open (NO)	3000	10	60	2000	PUR	40				
NJ2-12GM40-E2	Flush	2	3-wire	PNP	Normally-open (NO)	3000	10	60	2000	PUR	40				
NJ2-12GM40-E2-10M	Flush	2	3-wire	PNP	Normally-open (NO)	3000	10	60	10000	PUR	40				
NJ2-12GM40-E2-5M	Flush	2	3-wire	PNP	Normally-open (NO)	3000	10	60	5000	PUR	40				
NJ2-12GM40-E3	Flush	2	3-wire	PNP	Normally-closed (NC)	3000	10	60	2000	PUR	40				
NCB4-12GM35-Z4	Flush	4	2-wire	2-wire	Normally-open (NO)	1000	3.5	30	2000	PVC	35				
NCB4-12GM35-Z5	Flush	4	2-wire	2-wire	Normally-closed (NC)	1000	3.5	30	2000	PVC	35				
NBB4-12GM30-E0	Flush	4	3-wire	NPN	Normally-open (NO)	500	10	30	2000	PUR	35				
NBB4-12GM30-E2	Flush	4	3-wire	PNP	Normally-open (NO)	500	10	30	2000	PVC	30				
NBB4-12GM30-E2-5M	Flush	4	3-wire	PNP	Normally-open (NO)	500	10	30	5000	PVC	30				
NBB4-12GM30-E3	Flush	4	3-wire	PNP	Normally-closed (NC)	500	10	30	2000	PVC	30				
NBB4-12GM35-A0	Flush	4	4-wire	NPN	Complementary	2500	10	30	2000	PVC	35				
NBB4-12GM35-A2	Flush	4	4-wire	PNP	Complementary	2500	10	30	2000	PVC	35				
NBB4-12GM40-E0	Flush	4	3-wire	NPN	Normally-open (NO)	800	10	30	2000	PVC	40				
NBB4-12GM50-A0	Flush	4	4-wire	NPN	Complementary	1500	10	30	2000	PVC	50				
NBB4-12GM50-A2	Flush	4	4-wire	PNP	Complementary	1500	10	30	2000	PVC	50				

Model number	Type of installation	Detection range [mm]	Output type	Output type	Switching function	Switching frequency [Hz]	UB (min)	UB (max)	Cable length [mm]	Cable material	Length L	CCC	CSA	EAC	UL
NBB4-12GM50-E0	Flush	4	3-wire	NPN	Normally-open (NO)	800	10	30	2000	PVC	50				
NBB4-12GM50-E1	Flush	4	3-wire	NPN	Normally-closed (NC)	800	10	30	2000	PVC	50				
NBB4-12GM50-E3	Flush	4	3-wire	PNP	Normally-closed (NC)	800	10	30	2000	PVC	50				
NEB6-12GM50-E0	Semi-flush	6	3-wire	NPN	Normally-open (NO)	800	10	30	2000	PUR	50				
NEB6-12GM50-E1	Semi-flush	6	3-wire	NPN	Normally-closed (NC)	800	10	30	2000	PUR	50				
NEB6-12GM50-E2	Semi-flush	6	3-wire	PNP	Normally-open (NO)	800	10	30	2000	PUR	50				
NEB6-12GM50-E3	Semi-flush	6	3-wire	PNP	Normally-closed (NC)	800	10	30	2000	PUR	50				
NBN4-12GK50-E0	Non-flush	4	3-wire	NPN	Normally-open (NO)	1200	10	30	2000	PVC	50				
NBN4-12GK50-E2	Non-flush	4	3-wire	PNP	Normally-open (NO)	1200	10	30	2000	PVC	50				
NBN4-12GM40-E0	Non-flush	4	3-wire	NPN	Normally-open (NO)	800	10	30	2000	PVC	40				
NBN4-12GM40-E2	Non-flush	4	3-wire	PNP	Normally-open (NO)	800	10	30	2000	PVC	40				
NBN4-12GM40-Z0	Non-flush	4	2-wire	2-wire	Normally-open (NO)	700	5	60	2000	PVC	40				
NBN4-12GM50-E0	Non-flush	4	3-wire	NPN	Normally-open (NO)	1200	10	30	2000	PVC	50				
NBN4-12GM50-E1	Non-flush	4	3-wire	NPN	Normally-closed (NC)	1200	10	30	2000	PVC	50				
NBN4-12GM50-E2	Non-flush	4	3-wire	PNP	Normally-open (NO)	1200	10	30	2000	PVC	50				
NBN4-12GM50-E2-5M	Non-flush	4	3-wire	PNP	Normally-open (NO)	1200	10	30	5000	PVC	50				
NBN4-12GM50-E3	Non-flush	4	3-wire	PNP	Normally-closed (NC)	1200	10	30	2000	PVC	50				
NBN4-12GM60-A0	Non-flush	4	4-wire	NPN	Complementary	1000	10	30	2000	PVC	60				
NBN4-12GM60-A2	Non-flush	4	4-wire	PNP	Complementary	1000	10	30	2000	PVC	60				
NBN4-12GS40-Z4L	Non-flush	4	2-wire	2-wire	Normally-open (NO)	700	3.7	30	2000	PVC	40				
NCN4-12GM40-Z0	Non-flush	4	2-wire	2-wire	Normally-open (NO)	800	5	60	2000	PUR	40				
NCN4-12GM40-Z0-10M	Non-flush	4	2-wire	2-wire	Normally-open (NO)	800	5	60	10000	PUR	40				
NCN4-12GM40-Z1	Non-flush	4	2-wire	2-wire	Normally-closed (NC)	800	5	60	2000	PUR	40				
NJ4-12GM40-E	Non-flush	4	3-wire	NPN	Normally-open (NO)	2000	10	60	2000	PUR	40				
NJ4-12GM40-E2	Non-flush	4	3-wire	PNP	Normally-open (NO)	2000	10	60	2000	PUR	40				
NJ4-12GM40-E2-10M	Non-flush	4	3-wire	PNP	Normally-open (NO)	2000	10	60	10000	PUR	40				
NJ4-12GM40-E2-5M	Non-flush	4	3-wire	PNP	Normally-open (NO)	2000	10	60	5000	PUR	40				
NJ4-12GM40-E3	Non-flush	4	3-wire	PNP	Normally-closed (NC)	2000	10	60	2000	PUR	40				
NBN7-12GM35-E2	Non-flush	7	3-wire	PNP	Normally-open (NO)	300	10	30	2000	PVC	35				
NBN8-12GM35-A0	Non-flush	8	4-wire	NPN	Complementary	2000	10	30	2000	PVC	35				
NBN8-12GM35-A2	Non-flush	8	4-wire	PNP	Complementary	2000	10	30	2000	PVC	35				
NBN8-12GM50-A0	Non-flush	8	4-wire	NPN	Complementary	1500	10	30	2000	PVC	50				
NBN8-12GM50-A2	Non-flush	8	4-wire	PNP	Complementary	1500	10	30	2000	PVC	50				
NBN8-12GM50-E0	Non-flush	8	3-wire	NPN	Normally-open (NO)	1500	10	30	2000	PVC	50				
NBN8-12GM50-E2	Non-flush	8	3-wire	PNP	Normally-open (NO)	1500	10	30	2000	PVC	50				
NCN8-12GM35-Z4	Non-flush	8	2-wire	2-wire	Normally-open (NO)	750	3.5	30	2000	PVC	35				
NCN8-12GM35-Z5	Non-flush	8	2-wire	2-wire	Normally-closed (NC)	750	3.5	30	2000	PVC	35				
NEN10-12GM50-E0	Non-flush	10	3-wire	NPN	Normally-open (NO)	600	10	30	2000	PUR	50				
NEN10-12GM50-E1	Non-flush	10	3-wire	NPN	Normally-closed (NC)	600	10	30	2000	PUR	50				
NEN10-12GM50-E2	Non-flush	10	3-wire	PNP	Normally-open (NO)	600	10	30	2000	PUR	50				
NEN10-12GM50-E3	Non-flush	10	3-wire	PNP	Normally-closed (NC)	600	10	30	2000	PUR	50				

Accessories

BF 12	Mounting adapter, 12 mm
EXG-12	Quick-mounting bracket with fixed stop

