

Slot Width 15 mm




Standard Technical Data

Detection range	15 mm
Housing length L	48 mm
Housing width W	30 mm
Housing height H	60 mm
CSA	■
UL	■

For detailed data and description, see the datasheet. Further products can be found online at www.pepperl-fuchs.com.

Model number	Output type	Output type	Switching function	Voltage type	Switching frequency [Hz]	UB (min)	UB (max)	Connection type	Cable length [mm]	Cable material	CCC
SJ15-WO	2-wire	2-wire	Normally-closed (NC)	AC	25	20	253	Fixed cable	2000	PVC	■
SJ15-WS	2-wire	2-wire	Normally-open (NO)	AC	25	20	253	Fixed cable	2000	PVC	■
SJ15-A	4-wire	NPN	Complementary	DC	500	10	30	Fixed cable	2000	PVC	
SJ15-A-5M	4-wire	NPN	Complementary	DC	500	10	30	Fixed cable	5000	PVC	
SJ15-A2	4-wire	PNP	Complementary	DC	500	10	30	Fixed cable	2000	PVC	
SJ15-A2-V1	4-wire	PNP	Complementary	DC	500	10	30	M12 connector plug			
SJ15-E	3-wire	NPN	Normally-open (NO)	DC	500	10	30	Fixed cable	2000	PVC	
SJ15-E2	3-wire	PNP	Normally-open (NO)	DC	500	10	30	Fixed cable	2000	PVC	

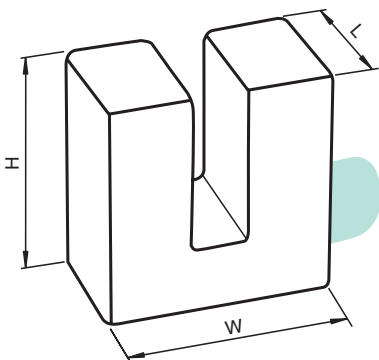

Accessories

V1-G-2M-PUR	Single-ended female cordset, M12, 4-pin, PUR cable
V1-W-2M-PUR	Single-ended female cordset, M12, 4-pin, PUR cable