


Slot Width 2 mm

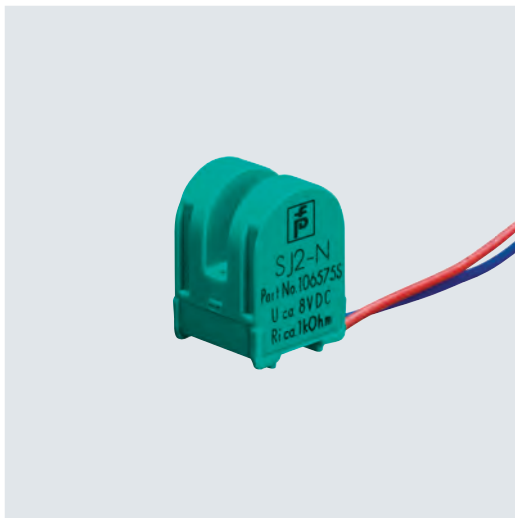

Standard Technical Data

Detection range	2 mm
Voltage type	DC
Cable length	500 mm
Housing length L	8 mm
UL	■

For detailed data and description, see the datasheet. Further products can be found online at www.pepperl-fuchs.com.

Model number	Output type	Output type	Switching function	Switching frequency [Hz]	UB (min)	UB (max)	SIL	Connection type	Cable material	Width W	Height H	ATEX	CSA	EAC	FM
SJ2-N	2-wire	NAMUR	Normally-closed (NC)	5000	8.2	8.2	2	Stranded cable		8	12	■	■	■	■
SB2-Z0 GELB	2-wire	2-wire	Normally-open (NO)	2000	5	30		Stranded cable		15	13		■		
SC2-N0-GN	2-wire	NAMUR	Normally-closed (NC)	5000	8.2	8.2		Fixed cable	PVC	15	13	■	■		
SC2-N0-YE	2-wire	NAMUR	Normally-closed (NC)	5000	8.2	8.2	2	Stranded cable	PVC	15	13	■	■		
SJ2-SN	2-wire	NAMUR with safety function	Normally-closed (NC)	5000	8.2	8.2	3	Stranded cable		15	13	■		■	■

