


## Slot Width 5 mm

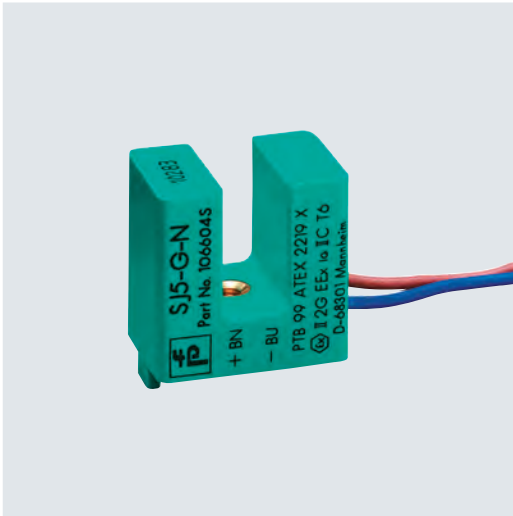

### Standard Technical Data

Detection range	5 mm
Output type	2-wire
Output type	NAMUR
Switching function	Normally-closed (NC)
Voltage type	DC
Switching frequency	2000 Hz
Operating voltage (min)	8.2 V
Operating voltage (max)	8.2 V
ATEX	■
CSA	■
UL	■

For detailed data and description, see the datasheet. Further products can be found online at [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com).

Model number	SIL	Connection type	Cable length [mm]	Cable material	Length L	Width W	Height H	EAC	FM
SJ5-N	2	Stranded cable	500		15	10	15	■	■
SJ5-G-N		Stranded cable	500		15	10	15		
SJ5-K-N		Fixed cable	2000	PVC	29	32	31		■

