

# F64 Series




### Standard Technical Data

<b>Special features</b>	Magnetic field resistant
<b>Type of installation</b>	Non-flush
<b>Detection range</b>	15 mm
<b>Output type</b>	PNP
<b>Voltage type</b>	DC
<b>Switching frequency</b>	100 Hz
<b>Operating voltage (min)</b>	10 V
<b>Operating voltage (max)</b>	30 V
<b>Connection type</b>	Fixed cable
<b>Cable Length</b>	2000 mm
<b>Cable material</b>	PUR
<b>Housing length L</b>	40 mm
<b>Housing width W</b>	25 mm
<b>Housing height H</b>	12 mm
<b>UL</b>	■

For detailed data and description, see the datasheet. Further products can be found online at [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com).

Model number	Output type	Switching function
CBN15-F64-A2	4-wire	Complementary
CBN15-F64-E2	3-wire	Normally-open (NO)

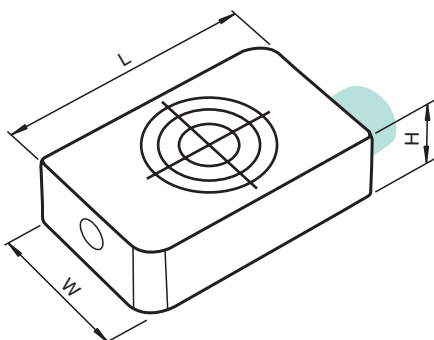

### Accessories

MH-F64	Mounting base
--------	---------------