




## Features

- Knurled nut suitable for tool mounting
- Mechanical detent for vibration protection
- Gold-plated and machined contacts


## Technical data

Number of pins	3	4
<b>Electrical data</b>		
Operating voltage $U_b$	Max. 60 V AC/DC	Max. 30 V AC/DC
Testing voltage	> 1500 $V_{eff}$ AC	
Operating current	Max. 3 A	
Volume resistance	< 5 m $\Omega$	
<b>Ambient conditions</b>		
Ambient temperature	-40 ... 90 °C for body Information on cable quality can be found beginning on page 10	
Degree of pollution	3	
<b>Mechanical data</b>		
Contact elements	Spring-loaded contact sockets	
Pin diameter	1 mm	
Degree of protection	IP67	
<b>Materials</b>		
Contacts	CuSn / Au	
Contact surface	Au	
Body	TPU, green	
Coupling nut	Die-cast zinc	
Push-on sleeve	Die-cast zinc	

## Dimensions

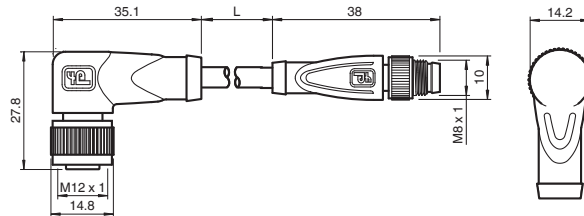

## Electrical connection

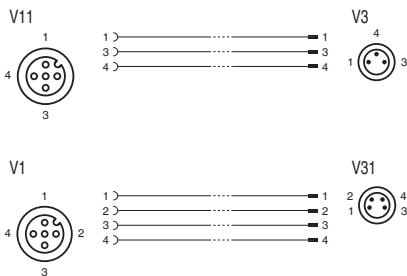

## Order codes

