




Features

- Gold-plated contacts




Technical data

Number of pins	3	4	5
Electrical data			
Operating voltage U_B	Max. 250 V AC/DC		Max. 60 V AC/DC
Operating current	Max. 4 A		
Volume resistance	< 5 mΩ		
Ambient conditions			
Ambient temperature	-40 ... 85 °C		
Degree of pollution	3		
Mechanical data			
Connection	1 x M12 socket Screw terminals for max. 0.75 mm ² PG7 cable gland		
Degree of protection	IP67		
Materials			
Contacts	CuSn		
Contact surface	Au		
Body	PA		
Coupling nut	CuSn / Ni		
Cable			
Cable diameter	4 ... 6 mm		

Dimensions

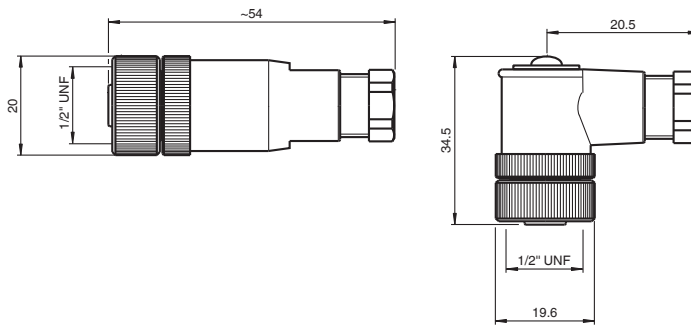

Electrical connection



Order codes

V . . . - .

Design
G straight
W angled

V12 V124 V125

● ○ ○
● ○ ○

- Standard, available in stock
- Available, minimum order quantity applies in some cases
- Combination not available

Number of pins

V12 3-pin
V124 4-pin
V125 5-pin