




## Technical data

Number of pins	5
<b>Electrical data</b>	
Operating voltage $U_B$	Max. 60 V
Operating current	Max. 4 A
Volume resistance	< 3 mΩ
<b>Ambient conditions</b>	
Ambient temperature	-25 ... 85°C
Degree of pollution	3
<b>Mechanical data</b>	
Connection	M12 plug/socket Screw terminals for max. 0.75 mm <sup>2</sup>
Degree of protection	IP67
<b>Materials</b>	
Contacts	CuZn
Contact surface	Au
Body	Die-cast zinc, nickel-plated
Coupling nut/push-on sleeve	Die-cast zinc, nickel-plated
<b>Cable</b>	
Cable diameter	5 ... 8 mm

## Features

- Iris spring provides easy shield bonding
- Gold-plated contacts
- Die-cast connector body

## Dimensions

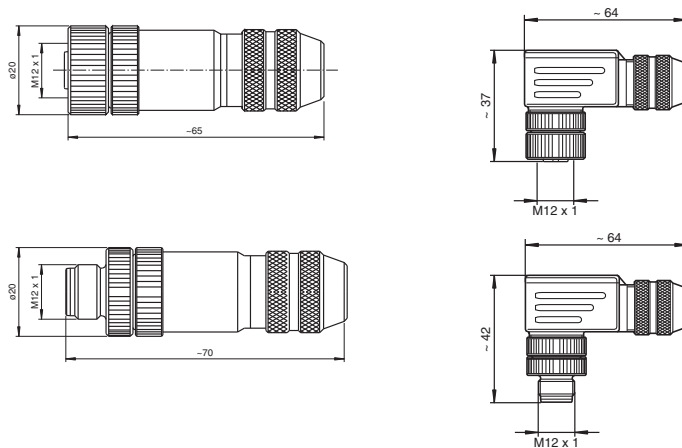

## Electrical connection

V15



V15S



## Order codes

V 1 5 . - . - A B G - P G 9

Connection  
S Socket  
P Plug

Design  
G straight  
W angled

V15 V15S  
● ●

- Standard, available in stock
- Available, minimum order quantity applies in some cases
- Combination not available