


## D3 Series

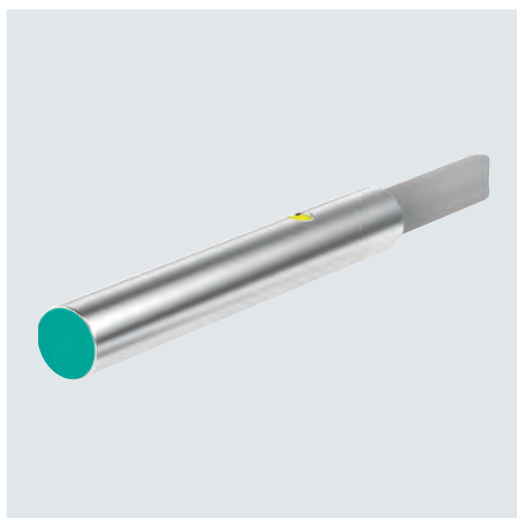

### Standard Technical Data

Type of installation	Flush
Output type	3-wire
Voltage type	DC
Operating voltage (min)	10 V
Operating voltage (max)	30 V
Housing length L	22 mm
Housing diameter D	3 mm
CSA	■
UL	■

For detailed data and description, see the datasheet. Further products can be found online at [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com).

Model number	Detection range [mm]	Output type	Switching function	Switching frequency [Hz]	Connection type	Cable length [mm]	Cable material
NBB0,6-3M22-E0	0.6	NPN	Normally-open (NO)	1400	Fixed cable	2000	PUR
NBB0,6-3M22-E0-0,3M-V3	0.6	NPN	Normally-open (NO)	1400	Fixed cable with M8 plug	300	PVC
NBB0,6-3M22-E1	0.6	NPN	Normally-closed (NC)	1300	Fixed cable	2000	PUR
NBB0,6-3M22-E2	0.6	PNP	Normally-open (NO)	1400	Fixed cable	2000	PVC
NBB0,6-3M22-E2-0,3M-V3	0.6	PNP	Normally-open (NO)	1400	Fixed cable with M8 plug	300	PVC
NBB0,6-3M22-E3	0.6	PNP	Normally-closed (NC)	1300	Fixed cable	2000	PUR
NBB1-3M22-E0	1	NPN	Normally-open (NO)	700	Fixed cable	2000	PVC
NBB1-3M22-E0-0,3M-V3	1	NPN	Normally-open (NO)	700	Fixed cable with M8 plug	300	PVC
NBB1-3M22-E2	1	PNP	Normally-open (NO)	700	Fixed cable	2000	PUR
NBB1-3M22-E2-0,3M-V3	1	PNP	Normally-open (NO)	700	Fixed cable with M8 plug	300	PVC

### Accessories

BF 4	Mounting adapter, 4 mm
V3-WM-2M-PUR	Single-ended female cordset, M8, 3-pin, PUR cable

